


# NXT™ SERIES

## NXT-C SPECIFICATIONS

Housing:	Single piece, die-cast A360 premium aluminum alloy with <0.6% copper content
Operating Temperature:	-40 °C to +40° C (-40 °F to +104 °F) <sup>1</sup>
Mounting:	1.625" - 2.375" (42 - 60 mm) O.D. Tenons
Mounting Methods:	Horizontal Entry or Post-Top Mount
Weight:	12 lbs (5.4 kg)
EPA Rating:	<0.34 ft <sup>2</sup> (< 0.032 m <sup>2</sup> )
Lens Material:	IK09 Rated Glass
Ingress Protection:	Power Supply and optical module are located inside chamber rated IP66 per IEC 60529/ANSI C136.25. Luminaire is rated for wet locations.
Finish:	Durable polyester powdercoat topcoat

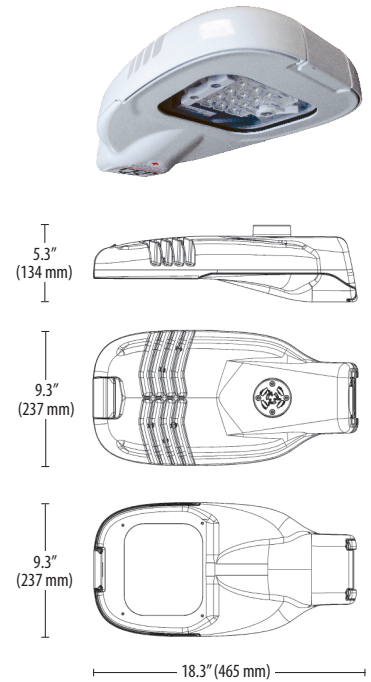

Available Colors:

GREY (RAL 7035)

BRONZE (RAL 7022)

BLACK (RAL 9005)



NXT-C (12 LEDs)						
<b>ELECTRICAL</b>						
Drive Currents (mA)	525	700	850	1050	1200	1250 <sup>4</sup>
Power Consumption (W)	22	27	34	42	48	50
Input Voltage (V)	120 - 277V (Standard)					
Surge Protection	Meets the requirements of ANSI C-High (10kV / 10kA)					
Power Factor	>0.90					

OPTICS & PERFORMANCE						
Photometry (Distribution)	2ES, 4AH					
Color Temperature (CCT)	4000K (Standard) 3000K & 5000K (Optional)					
Color Rendering Index (CRI)	~70					
3000K Fixture Efficacy (Lm/W)	101	99	96	88	84	83
4000K Fixture Efficacy (Lm/W)	105	104	99	94	90	88
3000K Fixture Output (Lm)	2,020	2,760	3,250	3,700	4,000	4,130
4000K Fixture Output (Lm)	2,300	2,800	3,368	3,930	4,300	4,400
LED L70 (Hours)	> 100,000 hours (@ maximum drive current)					
Shielding	Optional shields available upon request					

PHOTOCELL & CONTROLS	
Photocell Options	20-year life photocell available.
Control & Monitoring	Dimming power supply (1-10V) is standard equipment. We offer a complete range of control and monitoring solutions

1. 1250mA maximum temperature is 40 °C. -40 °C for fixed installation only. 2. Not all model configurations are DLC qualified - consult factory for details. 3. Only products with a CCT of 3000K (or less) meet International Dark Sky Association requirements. 4. 1250mA drive current only available with UL Certification option.

Values shown are subject to ±5% tolerance. Color temperatures shown are ±300K type 2ES distribution. If post-top version is specified, add 5.4" (137 mm) to overall length dimension. Illustrated Above: NXT-C in grey (RAL 7035). All information provided is subject to change without notice.



115 Chain Lake Drive, Halifax,  
Nova Scotia, Canada, B3S 1B3


T: +1.877.533.5755  
F: +1.888.533.5755

liveablecities.com  
info@liveablecities.com

# NXT™ SERIES

## NXT-S SPECIFICATIONS

Housing:	Single piece, die-cast A360 aluminum alloy with <0.6% copper content
Operating Temperature:	-40 °C to +50 °C (-40 °F to +122 °F) <sup>1</sup>
Mounting:	1.625" - 2.375" (42 - 60 mm) O.D. Tenons
Mounting Methods:	Horizontal Entry or Post-Top Mount
Weight:	18 lbs (8.2 kg)
EPA Rating:	<0.46 ft <sup>2</sup> (< 0.043 m <sup>2</sup> )
Lens Material:	IK09 Rated Glass
Ingress Protection:	Power Supply and optical module are located inside chamber rated IP66 per IEC 60529/ANSI C136.25. Luminaire is rated for wet locations.
Finish:	Durable polyester powdercoat topcoat

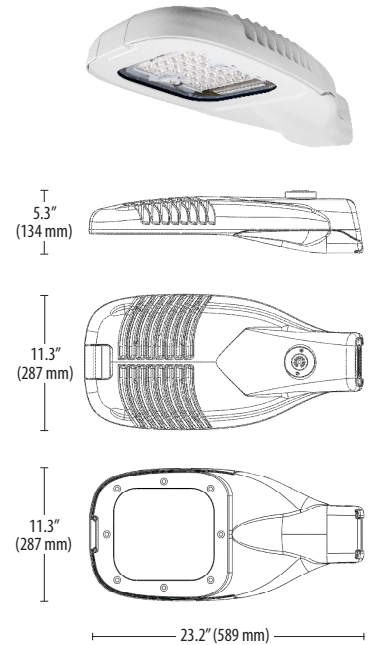

Available Colors:

GREY (RAL 7035)

BRONZE (RAL 7022)

BLACK (RAL 9005)



	NXT-S (12 LEDs)					NXT-S (24 LEDs)					NXT-S (36 LEDs)				
<b>ELECTRICAL</b>															
Drive Currents (mA)	350	450	525	600	700	350	450	525	600	700	350	450	525	600	700
Power Consumption (W)	14	17	20	23	27	28	35	41	46	54	42	52	60	69	80
Input Voltage (V)	120 - 240V (Standard), 277V (Optional), 347 - 480V (Optional), 220 - 240V (Optional)														
Surge Protection	Meets the requirements of ANSI C-High (10kV / 10kA)														
Power Factor	>0.90														

<b>OPTICS &amp; PERFORMANCE</b>															
Photometry (Distribution)	Type II, III, IV, V														
Color Temperature (CCT)	4000K (Standard) 3000K & 5000K (Optional)														
Color Rendering Index (CRI)	~70														
3000K Fixture Efficacy (Lm/W)	119	116	114	110	106	115	113	111	107	101	115	113	108	108	100
4000K Fixture Efficacy (Lm/W)	111	118	108	112	107	115	116	112	109	106	117	114	112	109	107
3000K Fixture Output (Lm)	1,670	1,970	2,270	2,540	2,870	3,230	3,970	4,540	4,940	5,480	4,830	5,860	6,490	7,420	8,020
4000K Fixture Output (Lm)	1,550	2,000	2,160	2,570	2,900	3,230	4,070	4,600	5,000	5,750	4,900	5,950	6,720	7,540	8,520
LED L70 (Hours)	> 100,000 hours (@ 350mA)														
Shielding	Optional shields available upon request														

<b>PHOTOCELL &amp; CONTROLS</b>	
Photocell Options	20-year life photocell available.
Control & Monitoring	Dimming power supply (1-10V) is standard equipment. We offer a complete range of control and monitoring solutions

1. For EN certifications, max ambient temp of +50 °C; all others max ambient of +40 °C. -40 °C for fixed installation only. 347-480V maximum temperature is 45 °C. 2. Not all model configurations are DLC qualified - consult factory for details.  
3. Only products with a CCT of 3000K (or less) meet International Dark Sky Association requirements.

Values shown are subject to ±5% tolerance. Color temperatures shown are ±300K type 2ES distribution. If post-top version is specified, add 5.4" (137 mm) to overall length dimension. Illustrated Above: NXT-S in grey (RAL 7035). All information provided is subject to change without notice.



115 Chain Lake Drive, Halifax,  
Nova Scotia, Canada, B3S 1B3


T: +1.877.533.5755  
F: +1.888.533.5755

liveablecities.com  
info@liveablecities.com

# NXT™ SERIES

## NXT-M SPECIFICATIONS

Housing:	Single piece, die-cast A360 aluminum with <0.6% copper content
Operating Temperature:	-40 °C to +50 °C (-40 °F to +122 °F) <sup>1</sup>
Mounting:	1.625" - 2.375" (42 - 60 mm) O.D. Tenons
Mounting Methods:	Horizontal Entry or Post-Top Mount
Weight:	26 lbs (11.8 kg)
EPA Rating:	<0.9 ft <sup>2</sup> (< 0.084 m <sup>2</sup> )
Lens Material:	IK09 Rated Glass
Ingress Protection:	Power Supply and optical module are located inside chamber rated IP66 per IEC 60529/ANSI C136.25. Luminaire is rated for wet locations.
Finish:	Durable polyester powdercoat topcoat

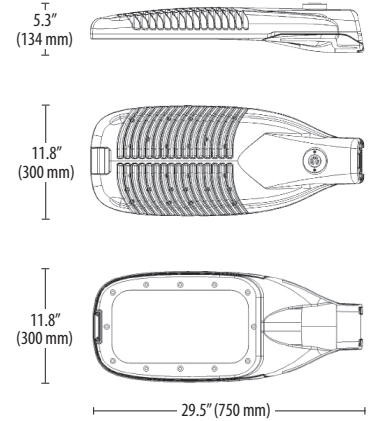

Available Colors:

GREY (RAL 7035)

BRONZE (RAL 7022)

BLACK (RAL 9005)



	NXT-M (48 LEDs)					NXT-M (60 LEDs)					NXT-M (72 LEDs)				
<b>ELECTRICAL</b>															
Drive Currents (mA)	350	450	525	600	700	350	450	525	600	700	350	450	525	600	700
Power Consumption (W)	53	68	80	92	108	65	84	99	113	133	78	100	117	135	158
Input Voltage (V)	120 - 240V (Standard), 277V (Optional), 347 - 480V (Optional), 220 - 240V (Optional)														
Surge Protection	Meets the requirements of ANSI C-High (10kV / 10kA)														
Power Factor	>0.90														

<b>OPTICS &amp; PERFORMANCE</b>															
Photometry (Distribution)	Type II, III, IV, V														
Color Temperature (CCT)	4000K (Standard) 3000K & 5000K (Optional)														
Color Rendering Index (CRI)	~70														
3000K Fixture Efficacy (Lm/W)	122	120	118	115	100	123	119	117	113	101	123	119	116	112	101
4000K Fixture Efficacy (Lm/W)	125	122	116	111	106	125	121	118	111	106	125	121	118	112	109
3000K Fixture Output (Lm)	6,490	8,150	9,430	10,620	10,850	8,010	10,030	11,540	12,810	13,430	9,600	11,902	13,550	15,130	15,910
4000K Fixture Output (Lm)	6,660	8,280	9,250	10,170	11,420	8,130	10,190	11,720	12,520	14,090	9,750	12,080	13,750	15,160	17,160
LED L70 (Hours)	> 100,000 hours (@ 350mA)														
Shielding	Optional shields available upon request														

<b>PHOTOCELL &amp; CONTROLS</b>	
Photocell Options	20 - year life photocell available.
Control & Monitoring	Dimming power supply (1-10V) is standard equipment. We offer a complete range of control and monitoring solutions

1. For EN certifications, max ambient temp of +50 °C; all others max ambient of +40 °C. -40 °C for fixed installation only. 277V Maximum temperature is 30 °C. 2. Not all model configurations are DLC qualified - consult factory for details.  
3. Only products with a CCT of 3000K (or less) meet International Dark Sky Association requirements.

Values shown are subject to ±5% tolerance. Color temperatures shown are ±300K type 2ES distribution. If post-top version is specified, add 5.4" (137 mm) to overall length dimension. Illustrated Above: NXT-M in grey (RAL 7035). All information provided is subject to change without notice.



115 Chain Lake Drive, Halifax,  
Nova Scotia, Canada, B3S 1B3

T: +1.877.533.5755  
F: +1.888.533.5755

liveablecities.com  
info@liveablecities.com

# NXT™ SERIES

## ORDERING INFORMATION

Example catalog number: NXT-125-5-S-2LB-3-GY-3-UL-X-2H

SERIES <sup>5</sup>	LEDS / BODY	VOLTAGE <sup>1</sup>	RECEPTACLE <sup>2</sup>	OPTICS	LED DRIVE CURRENT
<b>NXT</b>					
<b>NXT</b>	<b>12C</b> - Compact	<b>5</b> - 120 - 277V	<b>S</b> - No Receptacle <b>7</b> - 7-PIN Receptacle (C136.41)	<b>2ES</b> - Type II Max Throw <b>4AH</b> - ANZ High Throw	<b>5</b> - 525mA <b>7</b> - 700mA <b>8</b> - 850mA <b>B</b> - 1050mA <b>D</b> - 1200mA <b>E</b> - 1250mA <sup>3</sup>
<b>NXT</b>	<b>12S</b> - Small <b>24S</b> - Small <b>36S</b> - Small <b>48M</b> - Medium <b>60M</b> - Medium <b>72M</b> - Medium	<b>0</b> - 120 - 240V <b>2</b> - 220 - 240V <b>5</b> - 120 - 277V <b>6</b> - 347 - 480V <sup>10</sup>	<b>S</b> - No Receptacle <b>7</b> - 7-PIN Receptacle (C136.41)	<b>2LB</b> - Type II Standard <b>2HB</b> - Type II Backlight <b>2ES</b> - Type II Max Throw <b>2EM</b> - Type II Moderate Throw <b>2LG</b> - Type II Low Glare <b>3LB</b> - Type III Standard <b>3LM</b> - Type III Moderate <b>3HB</b> - Type III Backlight <b>4AH</b> - ANZ High Throw <b>5SM</b> - Type V Square <b>5RM</b> - Type V Round	<b>3</b> - 350mA <b>4</b> - 450mA <b>5</b> - 525mA <b>6</b> - 600mA <b>7</b> - 700mA

FINISH	TEMPERATURE (CCT) <sup>4</sup>	CERTIFICATION <sup>5</sup>	DRIVER OPTION	MOUNTING METHOD <sup>9</sup>	OTHER OPTIONS
<b>GY</b> - Grey (RAL 7035) <b>BK</b> - Black (RAL 9005) <b>BZ</b> - Bronze (RAL 7022)	<b>1</b> - 5000K <b>4</b> - 3000K <b>3</b> - 4000K	<b>UL</b> - cULus <b>CE</b> - European <b>NM</b> - NOM - Mexico <b>CT</b> - C-TICK (Australia) <b>CZ</b> - C-TICK (NZ)	<b>X</b> - Standard Dimming (1-10V) <b>D</b> - DALI <sup>7</sup>	<b>2H</b> - 2-Bolt Horizontal Mount	If applicable, insert 4 digit special product request code (SPR)
<b>GY</b> - Grey (RAL 7035) <b>BK</b> - Black (RAL 9005) <b>BZ</b> - Bronze (RAL 7022)	<b>1</b> - 5000K <b>4</b> - 3000K <b>3</b> - 4000K	<b>UL</b> - cULus <b>CE</b> - European <b>NM</b> - NOM - Mexico <b>CT</b> - C-TICK (Australia) <b>CZ</b> - C-TICK (NZ) <b>EN</b> - ENEC <sup>6</sup>	<b>X</b> - Standard Dimming (1-10V) <b>D</b> - DALI <sup>7</sup> <b>S</b> - Field Switchable Driver 120-240V (Optional) <sup>8</sup>	<b>2H</b> - 2-Bolt Horizontal Mount <b>4H</b> - 4-Bolt Horizontal Mount	If applicable, insert 4 digit special product request code (SPR)

## CATALOG NUMBER:

Include shorting caps 120-480V UL/CE with order?  Yes  No

Project Name:	Comments
Quantity:	
Approved By:	
Date:	


1. Our drivers will be provided for option 0. Other voltage options to be supplied with third-party drivers. 2. If photocells are required, they must be ordered separately. 3. 1250mA drive current only available with UL certification. 4. Other color temperatures available. 5. For EN certifications, max ambient temp of +50 °C; all others max ambient of +40 °C. -40 °C for fixed installation only. 6. EN for 220-240V Voltage Option only. 7. Available on selected configurations only, consult factory for details. 8. Not available with NXT-12S. 9. If post-top mount required, bracket must be ordered separately. Available with 2 bolt mount only. 10. NXT-M only - 347-480V drive current options are 350mA, 525 mA, and 700 mA.

By completing the Order Confirmation above, I certify that I am authorized to sign the confirmation on behalf of the company. Information provided is subject to change without notice. LED Roadway Lighting Ltd. supplies and warrants luminaires and proprietary control systems only. It is the responsibility of the client to select lighting poles and mounting arms that are suitable for the application (including but not limited to wind loading, seismic requirements, etc.) and the characteristics of the luminaire (e.g. EPA rating), and to confirm integrity and suitability of existing poles and mounting arms prior to installation.


# NXT™ SERIES

## PHOTOMETRY / DISTRIBUTION PATTERNS


**2LB** Type II Standard

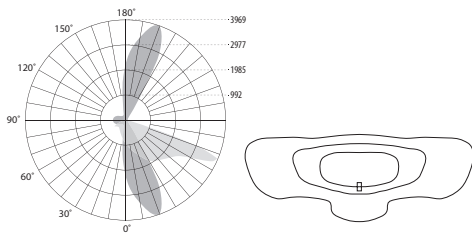


**2HB** Type II Backlight

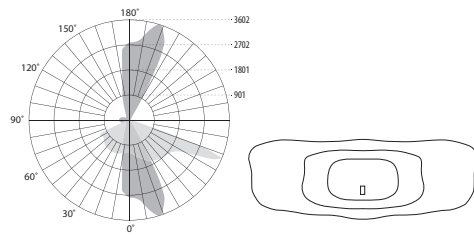


**2ES** Type II Max Throw

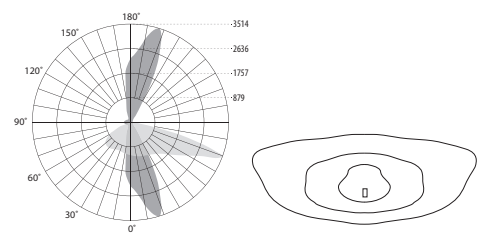


**2EM** Type II Moderate Throw

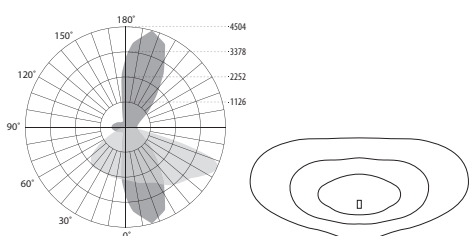


**2LG** Type II Low Glare

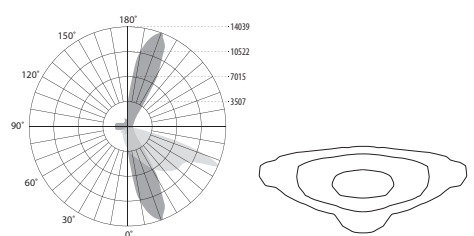


**3LB** Type III Standard

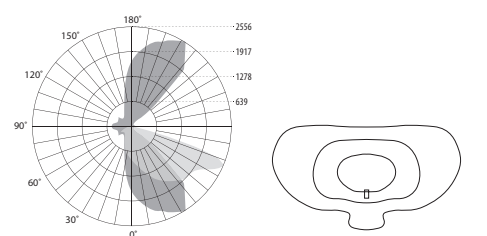


**3LM** Type III Moderate

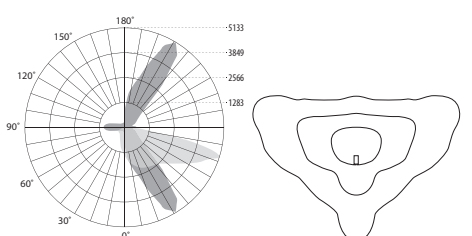


**3HB** Type III Backlight

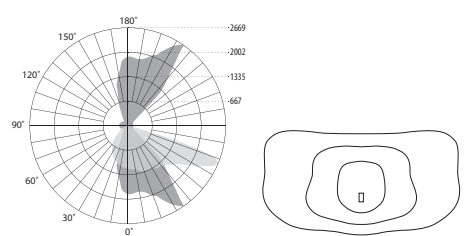

**4AH** ANZ High Throw

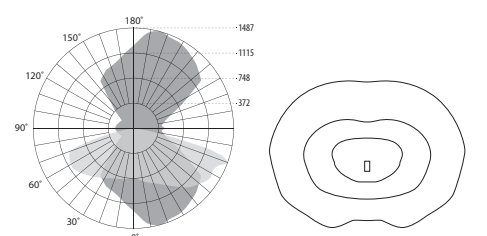

**5SM** Type V Square

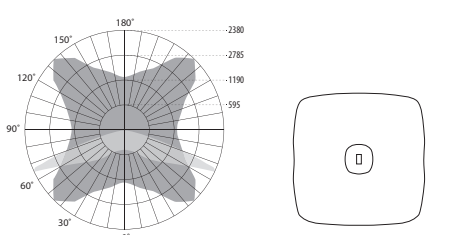

**5RM** Type V Round

